


Nayax

Onyx

适用于自动化和自助服务设备的紧凑型
非接触式读卡器及遥测设备

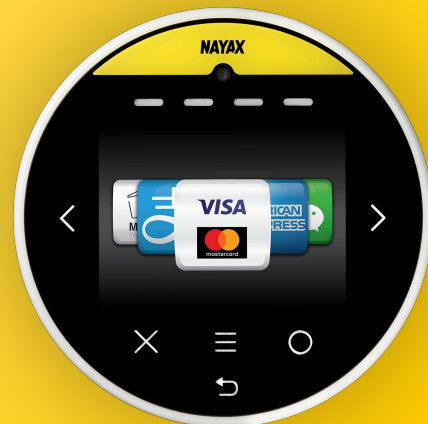

即插即用安装



多语言语音和文本交互




远程管理与更新



支持所有主流协议

接受所有类型的支付方式：

- * 借记卡和信用卡
- * 移动支付和近场通信（NFC）支付
- * 非接触式支付
- * 预付卡和封闭环境解决方案
- * 二维码

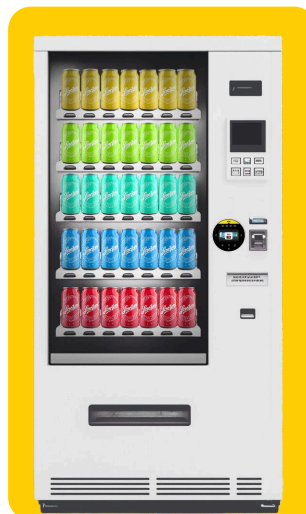

Nayax 的差异化优势： 为您的企业提供完整解决方案



先进的支付技术



集成的销售点
系统（POS）



实用的管理套件




营销与忠诚度解决方案

28mm



85mm

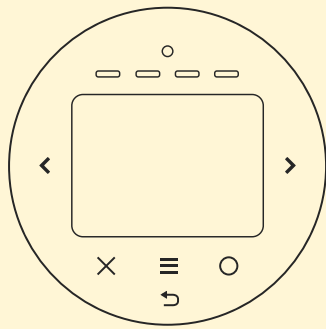

为自助服务和自动化设备运营商提供完整的支付解决方案
安装简便，设计新颖，助力您的业务成功

Installation Environment

Operating Temperature	-20°C to +55°C / -4°F to +131°F
Storage Temperature	-30°C to +85°C / -22°F to +185°F
Humidity	25% to 95% (non-condensing)
Dust & Water Resistance	IP 55
Flammability	UL-94 V0

Physical Dimensions

Diameter	85 mm / 3.3 inch
Depth	28 mm / 1.1 inch

Interface & Management

Display	Color Touch LCD display 2.4 inch IPS ; 320 x 240 pixels + 4 LEDs + 6 soft touch buttons
Architecture	ARM Technology – 2 x Cortex, 32 bit, 180/216MHz
Audio	Speaker + Buzzer
Localization	Multi language support – LCD text & voice audio instructions
Security	Support DES, 3DES, AES, RSA, ECC, SHA1 algorithms, Random Number Generator
Power Supply	12-42V DC, 12-24V AC; 5 Watts. Recommended External Power Supply: 24V DC / 2Amp
Anti-vandal	Internal shock/tilt detector, anti-vandal Dragontrail glass
Power Loss Protection	Super Caps with safe shutdown mechanism
External Interface	Ethernet, 2 X RS232 (RS232 or TTL level through SW), External reader, 1 X door open sensor, 1 X temperature sensor
Pulse Input/Output	6 pulse input/output interfaces + 1 Inhibit input
Communication	4G/Ethernet/NFC
Machine Protocols	MDB / DEX / DDCMP / Pulse / VCCS / ccTalk / JVMA

*Nayax reserves the right in its sole discretion to make any modifications without prior notice.

Contactless

Emv Level 1, Level 2: Visa payWave, MasterCard PayPass, Interac Flash, UnionPay qPBOC, AMEX ExpressPay, JCBJ/Speedy, FeliCa, Interac Flash, Discover D-PAS, CUP QuickPass, SuiCa

Other Cards Supported

13.56 MHz : NFC, MIFARE, ISO 14443 Type A and B, ISO 15693, SONY® FeliCa



Let Nayax help your business maximize your profits!