

# Nayax

## VPOS Media 4

### 您的No.1得力助手

面向自动化及自助服务设备的一体化支付解决方案



4 英寸彩色触摸屏



即插即用安装




为互动体验而打造



基于安卓系统的用户界面

### 一台设备，无限优势

- \* 通过空中下载（OTA）更新、远程诊断和遥测数据，降低运营成本
- \* 通过无缝的基于屏幕的体验和个性化优惠，保持客户参与度与忠诚度
- \* 凭借 PCI - PTS 认证增强安全性
- \* 即便在恶劣运营条件下，也能确保可靠性能

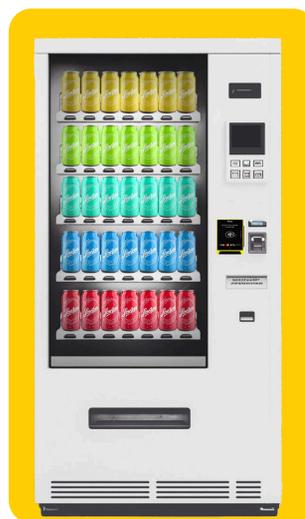

### Nayax的差异化优势： 为您的企业提供完整解决方案



可访问、多语言的客户体验



快速、可靠的支持，具备实时远程故障排除功能



通过Nayax核心管理套件实现全面掌控

## Main specifications

<b>Operating system</b>	Android 10	<b>SIM/SAM</b>	Nano SIM, nano SAM, eSIM
<b>Processors</b>	4 x Cortex A53 @ 1.3GHz	<b>Keys/ buttons</b>	Touchscreen
<b>Cellular</b>	4G CAT4, external antenna connector + internal backup antenna, 5-region module configuration	<b>Audio</b>	Speaker
<b>Memory</b>	8GB flash + 1GB LPDDR3, 2+16GB optional, microSD card slot	<b>Ports</b>	USB OTG, MDB slave, MDB master, 2 UART TTL, 2 RS232, DEX, MDB, 6 pulse, external reader, open-door input, external temperature sensor input, inhibit input
<b>Card readers</b>	Chip & PIN, NFC contactless, magnetic stripe	<b>Dimensions (W*H*D mm)</b>	85 x 107 x 47 (EVA-EPS Bill acceptor form factor)
<b>Camera</b>	Optional: auto focus 5MP	<b>Environmental</b>	Operating temperature: -20°C - 55°C Storage temperature: -40°C - 75°C Humidity: 5% - 95% Dust & water resistance: IP55, IK08
<b>QR scanner</b>	Using main camera or QR/barcode scanner	<b>Electrical certifications</b>	FCC, CE
<b>Display</b>	4" 480x480 pixels	<b>Payment certifications</b>	PCI-PTS, EMV Contact L1/ L2, Contactless L1, FeliCa, Mastercard TQM, Visa, Mastercard, Amex, Discover, JCB, Interac
<b>Sensors</b>	Time-of-flight sensor, internal temperature sensors, accelerometer sensor for anti-vandalism		
<b>Communication</b>	4G global, GPS (+GLONASS + BD), ethernet, Bluetooth 4.2, WiFi (2.4GHz + 5GHz) with built-in or external antenna		
<b>Power supply</b>	12-42 DC, graceful shutdown on power outage		

